



SERVICE	COP	
POWER	kVA	1982
POWER	kW	1982
RATED SPEED	r.p.m.	1.500
STANDARD VOLTAGE	V	400/230
RATED AT POWER FACTOR	Cos Phi	1,0



HEAVY RANGE

HIMOINSA Company with quality certification ISO 9001

HIMOINSA gensets are compliant with EC mark which includes the following directives:

- 2006/42/CE Machinery safety.
- 2014/30/UE Electromagnetic compatibility.
- 2014/35/UE electrical equipment designed for use within certain voltage limits
- 2000/14/EC Sound Power level. Noise emissions outdoor equipment. (amended by 2005/88/EC)
- 97/68/EC Emissions of gaseous and particulate pollutants. (amended by 2012/46/EU)
- EN 12100, EN 13857, EN 60204

Ambient conditions of reference according to ISO 8528-1:2018 normative: 1000 mbar, 25°C, 30% relative humidity.

Prime Power (PRP):

According to ISO 8528-1:2018, Prime power is the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load when operated for an unlimited number of hours per year under the agreed operating conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer. The permissible average power output (Ppp) over 24 h of operation shall not exceed 70 % of the PRP.

Continuous Power (COP): According to Standard ISO 8528-1:2018, this is the maximum power available for continuous loads for unlimited running hours a year between the maintenance times recommended by the manufacturer under the environmental conditions established by the same.

G2 class load acceptance in accordance with ISO 8528-5:2013

HIMOINSA HEADQUARTERS:

Fábrica: Ctra. Murcia - San Javier, Km. 23,6 | 30730 SAN JAVIER (Murcia) Spain
Tel.+34 968 19 11 28 Fax +34 968 19 12 17 Fax +34 968 19 04 20 |
info@himoinsa.com | www.himoinsa.com

Manufacture facilities:

SPAIN • FRANCE • INDIA • CHINA • USA • BRAZIL • ARGENTINA

Subsidiaries:

PORTUGAL | POLAND | GERMANY | UK | SINGAPORE | UAE | PANAMA |
DOMINICAN REPUBLIC | ARGENTINA | ANGOLA | SOUTH AFRICA



CONTAINER



40FT-HC



WATER-COOLED



THREE PHASE



50 HZ



NATURAL GAS

Himoinsa has the right to modify any feature without prior notice.

Weights and dimensions based on standard products. Illustrations may include optional equipment.

Technical data described in this catalogue correspond to the available information at the moment of printing.

The illustrations and images are indicative and may not coincide in their entirety with the product.

Industrial design under patent.



Engine Specifications | 1.500 r.p.m.

Rated Output (COP)	kW	2080
Manufacturer		MTU
Model		16V4000L64
Engine Type		4-stroke Otto Cycle
Injection Type		Carburization
Aspiration Type		Turbocharged and after-cooled
Number of cylinders and arrangement		16-V
Bore and Stroke	mm	170 x 210
Displacement	L	76,3
Cooling System		Coolant
Lube Oil Specifications		SAE 40
Compression Ratio		14,0

Fuel Consumption 100% COP	Nm3/h	481,4
Fuel Consumption 75 % COP	Nm3/h	368,5
Fuel Consumption 50 % COP	Nm3/h	257,1
Lube oil consumption with full load	g/kWh	0,2
Total oil capacity including tubes, filters	L	285
Total coolant capacity	L	530
Governor	Type	Electrical
Air Filter	Type	Dry

- 
- Natural Gas engine
 - 4-stroke cycle
 - Water-cooled
 - 24V electrical system
 - Dry air filter
 - Remote radiator
 - HTW sender
 - LOP sender
 - Electronic governor
 - Hot parts protection
 - Moving parts protection



Generator Specifications | STAMFORD


Manufacturer		STAMFORD
Model		LV804T
Poles	No.	4
Connection type (standard)		Star
Mounting type		S-00 21"
Insulation	Class	H class

Enclosure (according IEC-34-5)	IP23
Exciter system	Self-excited, brushless
Voltage regulator	A.V.R. (Electronic)
Bracket type	Double drive-shaft
Coupling system	Flexible disc
Coating type	Standard (Vacuum impregnation)

- 
- Self-excited and self-regulated
 - 4 poles
 - AVR governor
 - IP23 protection
 - H class insulation

WEIGHT AND DIMENSIONS

Standard Version		
Length (L)	mm	12.192
Height (H)	mm	2.896
Width (W)	mm	2.438
Maximum shipping volume	m ³	86,08
Weight with liquids in radiator and sump	Kg	34450
Autonomy	Hours	Ask

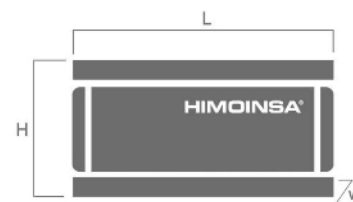

SOUND PRESSURE

Sound pressure level	dB(A)@7m	82 ± 2,4
----------------------	----------	----------

APPLICATION DATA

EXHAUST SYSTEM

Maximum exhaust temperature	°C	416
Exhaust Gas Flow	m ³ /min	133,4
Maximum allowed back pressure	mbar	60

NECESSARY AMOUNT OF AIR

Intake air flow	m ³ /h	7748
Cooling Air Flow	m ³ /s	39,8
Alternator fan air flow	m ³ /s	3,2

STARTING SYSTEM

Starting power	kW	9 x 2
Starting power	CV	12,24 x 2
Auxiliary Voltage	Vdc	24

FUEL SYSTEM

Fuel Oil Specifications	Natural Gas	
Lower heating value (LHV)	kWh/Nm ³	9,5
Composition *	95% Methane	
Fuel supply connection size	mm	100
Fuel supply pressure	mbar	180 - 250



Container version

- Soundproofing provided by high-density volcanic rock wool
- High mechanical resistance
- Door with window to visualize control panel, alarms and measurements
- Reinforced lifting points for crane hoisting and lower ones for transportation by forklift
- Residential steel silencer with -35dB attenuation and tilting cap in the exhaust
- Anti-vibration shock absorbers
- Steel chassis
- Manual oil extraction pump
- Robust construction designed for continuous or emergency applications
- Stainless steel fittings
- Emergency stops
- Easy access to the power connection
- Easy access for chassis cleaning
- Silent-block with anti-corrosion protection between the genset and the chassis
- Easy access to fill radiator through the roof



Gas ramp

- Gas filter
- Double solenoid valve
- Gas pressure regulator
- Low pressure switch
- High pressure switch
- Inlet pressure manometer
- Outlet pressure manometer



FEATURES OF THE CONTROL UNITS

	CEM 7-G	CEA 7-G	CEC 7	CEM 7-G + CEC7
Generator Readings	Voltage between phases	•	•	•
	Voltage between neutral and phase	•	•	•
	Current intensities	•	•	•
	Frequency	•	•	•
	Apparent power (Kva)	•	•	•
	Active power (Kw)	•	•	•
	Reactive power (kVAR)	•	•	•
	Power factor	•	•	•
	Low feed pressure	•	•	•
	Sealing check solenoid valve	•		•
Mains Readings	Voltage between phases		•	•
	Voltage between phases and neutral		•	•
	Current intensities		•	•
	Frequency		•	•
	Apparent power			
	Active power			
	Reactive power			
	Power factor			
Engine Readings	Coolant temperature	•		•
	Oil pressure	•		•
	Battery voltage	•		•
	R.P.M.	•		•
	Battery charge alternator voltage	•		•
Engine Protections	High water temperature	•		•
	High water temperature by sensor	•		•
	Low water temperature by sensor	•		•
	Low oil pressure	•		•
	Low oil pressure by sensor	•		•
	Low water level	•		•
	Unexpected shutdown	•		•
	Stop failure	•		•
	Battery voltage failure	•		•
	Battery charge alternator failure	•		•
	Overspeed	•		•
	Underspeed	•		•
	Start failure	•		•
	Emergency stop	•	•	•

• Standard

ⓘ Optional

	CEM 7-G	CEA 7-G	CEC 7	CEM 7-G + CEC7
Alternator Protections	High frequency	•	•	•
	Low frequency	•	•	•
	High voltage	•	•	•
	Low voltage	•	•	•
	Short-circuit	•	•	•
	Asymmetry between phases	•	•	•
	Incorrect phase sequence	•	•	•
	Inverse power	•	•	•
	Overload	•	•	•
	Genset signal drop	•	•	•
Counters	Total hour counter	•	•	•
	Partial hour counter	•	•	•
	Kilowatt meter	•	•	•
	Starts valid counters	•	•	•
	Starts failure counters	•	•	•
	Maintenance	•	•	•
Communications	RS232	⓪	⓪	⓪
	RS485	⓪	⓪	⓪
	Modbus IP	⓪	⓪	⓪
	Modbus	⓪	⓪	⓪
	CCLAN	⓪	⓪	⓪
	Software for PC	⓪	⓪	⓪
	Analogue modem	⓪	⓪	⓪
	GSM/GPRS modem	⓪	⓪	⓪
	Remote screen	⓪	⓪	⓪
	Tele signal	⓪ (8 + 4)	⓪ (8 + 4)	⓪ (8 + 4)
	J1939	⓪	⓪	⓪
Features	Alarm history	• (10) / (opc. +100)	• (10) / (opc. +100)	• (10) / (opc. +100)
	External start	•	•	•
	Start inhibition	•	•	•
	Mains failure start	•	•	•
	Start under normative EJP	•	•	•
	Pre-heating engine control	•	•	•
	Genset contactor activation	•	•	•
	Mains & Genset contactor activation	•	•	•
	Engine temperature control	•	•	•
	Manual override	•	•	•
	Programmable alarms	•	•	•
	Genset start function in test mode	•	•	•
	Programmable outputs	•	•	•
	Multilingual	•	•	•
Special Functions	GPS Positioning	⓪	⓪	⓪
	Synchronisation	⓪	⓪	⓪
	Mains synchronization	⓪	⓪	⓪
	Second Zero elimination	⓪	⓪	⓪
	RAM7	⓪	⓪	⓪
	Remote screen	⓪	⓪	⓪
	Programming timer	⓪	⓪	⓪

• Standard

⓪ Optional



CONTROL PANELS

M5

Digital manual Auto-Start control panel and thermal magnetic protection (depending on current and voltage) and differential with CEM7.
Digital control unit CEM7

AS5

Automatic panel WITHOUT transfer switch and WITHOUT mains control with CEM7 unit. (*) AS5 as optional with CEA7 unit. Automatic panel without transfer switch and WITH mains control.

CC2

Himoinsa Switching cabinet WITH display.
Digital control unit CEC7

AS5 + CC2

Automatic panel WITH transfer switch and with mains control. The display will be on the genset and on the cabinet.
Digital control unit CEM7+CEC7

AC5

Automatic mains failure control panel. Wall-mounted cabinet WITH transfer switch and thermal magnetic protection (depending on current and voltage).
Digital control unit CEA7



Electrical System Container

- Control panel and emergency stop button
- Power panel
- Battery charger (standard on automatic control panels)
- Heating resistor (standard on sets with automatic control panels)
- Battery charge alternator with ground connection
- Starter battery/ies installed (cables and bracket included)
- Ground connection electrical installation with connection ready for ground spike (not supplied)
- Battery isolator