


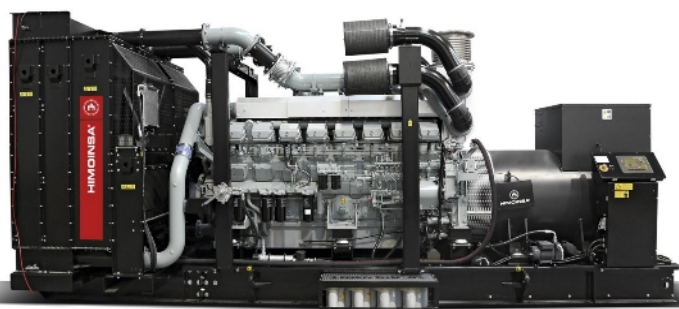

MEDIUM-VOLTAGE RANGE

HIMOINSA Company with quality certification ISO 9001

HIMOINSA gensets are compliant with EC mark which includes the following directives:

- 2006/42/CE Machinery safety.
- 2014/30/UE Electromagnetic compatibility.
- 2014/35/UE electrical equipment designed for use within certain voltage limits
- 2000/14/EC Sound Power level. Noise emissions outdoor equipment. (amended by 2005/88/EC)
- 97/68/EC Emissions of gaseous and particulate pollutants. (amended by 2012/46/EU)
- EN 12100, EN 13857, EN 60204
- IEC 62271-1 Common specification for high voltage switchgear and controlgear standards
- IEC 60502-1 Power cables with extruded insulation for rated voltages from 1 kV up to 30 kV

Ambient conditions of reference according to ISO 8528-1:2018 normative: 1000 mbar, 25°C, 30% relative humidity.

Prime Power (PRP):

According to ISO 8528-1:2018, Prime power is the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load when operated for an unlimited number of hours per year under the agreed operating conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer. The permissible average power output (Ppp) over 24 h of operation shall not exceed 70 % of the PRP. By manufacturer's instructions, maximum operation of 500 h per year.

Emergency Standby Power (ESP):

According to ISO 8528-1:2018, Emergency standby power is the maximum power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200 h of operation per year with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. The permissible average power output over 24 h of operation shall not exceed 70 % of the ESP

Continuous Power (COP): According to Standard ISO 8528-1:2018, this is the maximum power available for continuous loads for unlimited running hours a year between the maintenance times recommended by the manufacturer under the environmental conditions established by the same.

G2 class load acceptance in accordance with ISO 8528-5:2013

HIMOINSA HEADQUARTERS:

Fábrica: Ctra. Murcia - San Javier, Km. 23,6 | 30730 SAN JAVIER (Murcia) Spain
Tel. +34 968 19 11 28 Fax +34 968 19 12 17 Fax +34 968 19 04 20 |
info@himoinsa.com | www.himoinsa.com

Manufacture facilities:

SPAIN • FRANCE • INDIA • CHINA • USA • BRAZIL • ARGENTINA

Subsidiaries:

PORTUGAL | POLAND | GERMANY | UK | SINGAPORE | UAE | PANAMA |
DOMINICAN REPUBLIC | ARGENTINA | ANGOLA | SOUTH AFRICA

Ctra. Murcia - San Javier, km. 23,6 | 30730 San Javier (Murcia) SPAIN | Tel.: +34 902 19 11 28 / +34 968 19 11 28
Fax: +34 968 19 12 17 | Export Fax +34 968 19 04 20 | E-mail: info@himoinsa.com | www.himoinsa.com



SERVICE		PRP / DCP	ESP
POWER	kVA	2383	2631
POWER	kW	1906	2105
RATED SPEED	r.p.m.	1.500	
STANDARD VOLTAGE	KV	11	
AVAILABLE VOLTAGES	KV	3,3 · 6 · 6,3 · 6,6 · 10	
RATED AT POWER FACTOR	Cos Phi	0,8	



OPEN SKID



OPEN SKID



WATER-COOLED



THREE PHASE



50 HZ



DIESEL

Himoinsa has the right to modify any feature without prior notice.

Weights and dimensions based on standard products. Illustrations may include optional equipment.

Technical data described in this catalogue correspond to the available information at the moment of printing.

The illustrations and images are indicative and may not coincide in their entirety with the product.

Industrial design under patent.

Available Voltages

3,3 kV					
Prime KVA	2393	Prime KW	1914	Amps	418,6
Standby KVA	2628	Standby KW	2103	Amps	459,8
6 kV					
Prime KVA	2393	Prime KW	1914	Amps	230,2
Standby KVA	2637	Standby KW	2109	Amps	253,7
6,3 kV					
Prime KVA	2390	Prime KW	1912	Amps	219
Standby KVA	2634	Standby KW	2107	Amps	241,4
6,6 kV					
Prime KVA	2390	Prime KW	1912	Amps	209,1
Standby KVA	2637	Standby KW	2109	Amps	230,6
10 kV					
Prime KVA	2385	Prime KW	1908	Amps	137,7
Standby KVA	2628	Standby KW	2103	Amps	151,7
11 kV					
Prime KVA	2383	Prime KW	1906	Amps	125,1
Standby KVA	2631	Standby KW	2105	Amps	138,1

Rated at power factor (Cos Phi) : 0,8



Engine Specifications | 1.500 r.p.m.

Rated Output (PRP) / DCP	kW	1986
Rated Output (ESP)	kW	2193
Manufacturer	MITSUBISHI	
Model	S16R2 PTAW-E	
Engine Type	4-stroke diesel	
Injection Type	Direct	
Aspiration Type	Turbocharged and after-cooled	
Number of cylinders and arrangement	16-V	
Bore and Stroke	mm	170 x 220
Displacement	L	79,9
Cooling System	Water	
Lube Oil Specifications	API CF, SAE 15W40	
Compression Ratio	14,0:1	

Fuel Consumption ESP	l/h	552,9
Fuel Consumption 100% PRP	l/h	495,4
Fuel Consumption 75 % PRP	l/h	362,5
Fuel Consumption 50 % PRP	l/h	247,7
Fuel Consumption 25 % PRP	l/h	133,5
Total oil capacity including tubes, filters	L	290
Total coolant capacity	L	761
Heat dissipated by coolant	kW	773
Governor	Type	Electrical
Air Filter	Type	Dry



- Oil temperature sensor
- Low coolant level sensor
- Exhaust gas compensator
- Diesel engine
- 4-stroke cycle
- Water-cooled
- 24V electrical system
- Standard air filter
- Standard fuel filter
- Standard oil filter
- Radiator with pusher fan
- HTW sender
- LOP sender
- Electronic governor
- Hot parts protection
- Moving parts protection



Generator Specifications | STAMFORD

Manufacturer	STAMFORD	
Model	HV804S	
Poles	No.	4
Connection type (standard)	Star	
Insulation	Class	F class
Enclosure (according IEC-34-5)	IP23	


Exciter system	Self-excited, brushless
Voltage regulator	A.V.R. (Electronic)
Bracket type	Double drive-shaft
Coupling system	Elastic Coupling
Coating type	Standard (Vacuum impregnation)



- Self-excited and self-regulated
- IP23 protection
- F class insulation

WEIGHT AND DIMENSIONS

Standard Version		
Length (L)	mm	Ask
Height (H)	mm	Ask
Width (W)	mm	Ask
Weight with liquids in radiator and sump	Kg	Ask
Autonomy	Hours	Ask

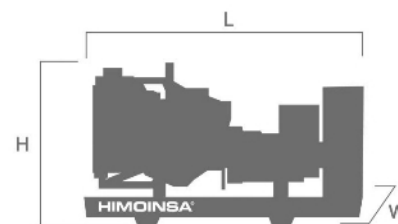

APPLICATION DATA

EXHAUST SYSTEM

Maximum exhaust temperature	°C	490
Exhaust Gas Flow	m³/min	536
Maximum allowed back pressure	mm H2o	600
Heat dissipated by exhaust pipe	kW	1946

NECESSARY AMOUNT OF AIR

Intake air flow	m³/h	12120
Cooling Air Flow	m³/s	41,3
Alternator fan air flow	m³/s	3

STARTING SYSTEM

Starting power	kW	7,5 x 2
Starting power	CV	10,2 x 2
Recommended battery	Ah	400
Auxiliary Voltage	Vdc	24

FUEL SYSTEM

Fuel Oil Specifications	Diesel	
Maximum power suction pump	mm Hg	75
Maximum return feed pump	mm Hg	150



Open set version

- Steel chassis
- Emergency stop button
- Oil sump extraction kit
- Anti-vibration shock absorbers
- Steel industrial silencer -15db(A) attenuation (Opcional).
- Steel residential silencer -35db(A) attenuation. (Opcional).



Electrical system


- Maintenance-free and anti-explosion battery
- Battery Switch
- Medium voltage cubicle separated with overcurrent protections and measurement transformers
- Battery charger
- Water Jacket Heater
- Control panel and emergency stop button
- Battery charger alternator with ground connection
- Starter battery/ies installed (cables and bracket included)
- Ground connection electrical installation with connection ready for ground spike (not supplied)

CM CENTRAL AUTOMATIC AGC-4.

Automatic control panel WITHOUT ATS (Automatic Transfer Switch) and WITHOUT mains control. No power circuits.

The AGC-4 center is a control unit containing all necessary measures for the protection and control functions of a generator. It can be used as a single unit for a generator, or connect into a complete energy management system for synchronization projects, island type or in parallel with the mains. The AGC-4 contains all the circuitry necessary 3-phase measuring, and all values and alarms are presented on the LCD screen.

The AGC-4 has been successfully developed an innovative facility management solution that can handle up to 256 generators in an application generator circuit breakers, 16 mains feeders with mains and tie breaker and 8 bus tie breakers on the generatorbus or load bus.

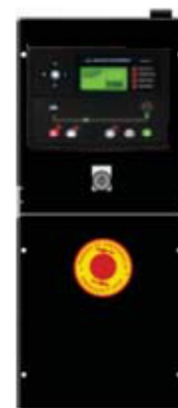

KEY LOAD SHARE FEATURES:

- Start sequential set
- Peak lopping
- Manual voltage/frequency adjustment
- R.O.C.O.F. and vector shift
- Generator load demand
- Automatic hours run balancing
- Mains (Utility) de-coupling
- Mains (Utility) de-coupling test mode
- Dead bus sensing
- Bus failure detection
- Direct governor and AVR control
- Volts and frequency matching
- kW and kV Ar load sharing Opción Power Management (PMS)
- Start and stop on demand
- Selection priorities generators in parallel
- Selection priorities parallel networks
- Cargo Control
- Group Multiboot
- Control relay earthed neutral
- Large consumindores Control (management of requests)
- Shot nonessential loads in switchingQuick setup

KEY FEATURES

- Comprehensive loadshare capabilities
- Configurable inputs (33)
- Configurable outputs(24)
- Voltage measurement
- Built-in governor and AVR control
- kW overload alarms

- Comprehensive electrical protection
- Magnetic pick-up
- Electronic engine capability
- Remote communication system up to two channels (redundant system)
- RS485 y RS 23 remote communications
- Modbus RTU
- PLC functionality
- Multi event exercise timer
- Back-lit LCD 4-line text display
- Multiple display languages
- Automatic start/Manual start
- Audible alarm
- Fixed and flexible LED indicators
- Event log (256)
- Engine protection
- Fault condition notification to a designated PC
- Front panel mounting
- Protected front panel programming
- PC configuration
- Configurable alarms and timers
- Configurable start and stop timers
- SMS alert messaging
- Remote monitoring
- Compatible with AGC-100 Y 200.
- Allows synchronization Dynamics, static and close before excitation (CBE).

KEY BENEFITS

- RS232 & RS485 can be used at the same time
- DSENet connection for system expansion
- PLC functionality
- Auto voltage sensing
- Five step dummy load support
- Five step load shedding support
- High number of inputs and outputs
- Worldwide language support
- Configuration Suite PC software
- Direct USB connection to PC
- Ethernet monitoring
- USB host
- Data logging & trending
- Process Emulation
- Derating function parameters for temperature rise in warm areas
- Function Idle running in freezing temperatures (preheating at low rpm)
- Auto battery test status, check the battery ramp feature
- Asymmetry of batteries, battery for discriminating shabby
- Control fan motor and living
- Error Detection in switchgear
- Control pump fuel tank
- Connection redundancy controllers without any additional equipment

ENGINE ALARMS

- High coolant temperature.
- Low oil pressure.
- Battery charge alternator
- Start failure.
- Low water level.
- Fuel storage.
- Overspeed.
- Under speed.
- Low battery voltage.

- High coolant temperature by sensor.
- Low oil pressure by sensor.
- Low fuel level by sensor.
- Unexpected shutdown.
- Stop failure.
- Low engine temperature.
- Genset voltage drops.
- Emergency stop.

GENERATOR ALARMS

- Over-load
- Unbalanced voltage
- Over voltage
- Under voltage
- Over frequency
- Under frequency
- Over load
- Short-circuit
- Inverse Power
- Incorrect phase sequence
- Asymmetry among phases
- Emergency stop

GENSET READINGS

- Voltage among phases
- Voltage among phases and neutral
- Amperage
- Frequency
- Apparent power (kVA)
- Active power (kW)
- Reactive power (kVAr)
- Power factor

ENGINE READINGS

- Coolant temperature
- Oil pressure
- Fuel level (%)
- Battery voltage
- R.P.M.
- Battery charge alternator voltage

ENGINE PROTECTIONS

- High water temperature
- High coolant temperature by sensor
- Low engine temperature by sensor
- Low oil pressure
- Low oil pressure by sensor
- Low coolant level
- Unexpected shutdown
- Fuel storage
- Fuel storage by sensor
- Stop failure
- Battery voltage failure
- Battery charge alternator failure
- Overspeed
- Under speed
- Start failure
- Emergency Stop

ALTERNATOR PROTECTIONS

- High frequency
- Low frequency
- High voltage
- Low voltage
- Short-circuit
- Asymmetry among phases
- Incorrect phase sequence
- Inverse power
- Overload
- Genset signal droop

Operating Mode

1. **Locked / OFF.**

In this operating mode the controller is disconnected from the system, while this mode is impossible that this selected group start automatically or manually. It should select this mode whenever required to do some work or maintenance to avoid starting the group.

2. **Manual Mode / MAN.**

In this mode of operation the group started through the manual controls of the controller. Also closing the switch will manually if the driver supports operation whether we are isolated from the network as if we already have it synchronized.

3. **Automatic Mode / AUTO.**

a. **Parallel with main / LOAD SHARING.**

In this mode group and network working in parallel, the load is shared between the two. The group will take a load ramp weighting process, this means that load slowly thereafter are equally true of the loss of load or load shedding.

b. **Parallel with main / BASE LOAD.**

In this mode of operation the group will produce the base system power for this group should be adjusted to produce a given load and this will remain unchanged over time, or until you change the setting. This mode means that the group must be running in parallel with the main.

c. **Parallel with main / PEAK SHAVING.**

This active mode and set the threshold settings and times to be confirmed. The plant is kept fed through the network at all times to monitor the system from imported energy does not exceed a set threshold. Exceeded this threshold and time confirmation, the system gives the boot order for the group need imported power remains below the threshold setting.

d. **Parallel with main / LOAD TAKEOVER.**

Installation Mode where cargo moves from mains to generator, for example, periods of peak demand periods or at risk of power outages.

e. **Parallel with main to fixed power/ MAINS POWER EXPORT.**

Power plant with fixed setpoint power in kW (excluding building load).

f. **Group REMOTE SHOCK:**

Used when the generator has to supply the load of a distribution transformer has to be disconnected for maintenance service.

MEDIUM VOLTAGE SWITCHGEAR


Constructive characteristics

The basic version of medium voltage switchboards (metal clad according to the 60298 standard), belongs to LSC2x Fitted integral SF6 gas insulated busbar, breaker and switch **(1)**.

Dimensions and weight: To be advised.

General Electrical Characteristics

- Rated insulation voltage 24 KV
- Rated operating voltage 3...20 KV
- Rated power frequency withstand voltage 50 KV
- Rated impulse withstand voltage 125 KV
- Rated frequency 50 Hz/60Hz
- Rated main busbar current..... 400/630 A **(2)**
- Rated short time current (RMS) 16KA 1s/20 KA 1 s
- Rated peak short circuit current..... 50 KA for 1 s
- Power supply auxiliary circuit..... 24...230 Vcc o 230Vca
- Protection degree..... IP 33 + IPX7
- Installation INDOOR
- Applicable standar IEC **(3)**
- Ambient desing temperature 40 ° C
- Number of phases 3P

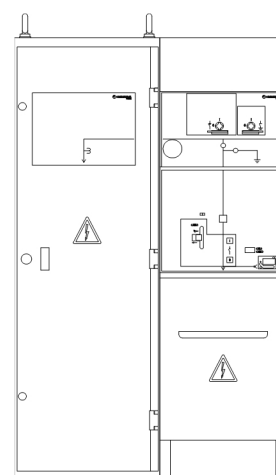

Measure, switch and protection devices, Genset inlet:

1. Out main cell :

- Three (3) voltage transformers insulation up to 13,6KV, cast resin type with:
✓ Value $X^{***}:\sqrt{3}/110:\sqrt{3} V$, 50/60hz, burden and accuary 40 VA C 1.0,5, 50VA 3P fixed versión.

(1) Only in protection cell


(2) The rated current is to a máximum ambient temeperature of 40°C. Consult other temperaturas.

(3) Standards: IEC 62271-1, IEC 62271-200, IEC 60265-1, IEC 62271-102, IEC 62271-105, IEC 62271-100, IEC 602255, IEC 60259 e IEC 61958.

X^{***} to define the order according to rated voltage from 3 a 13,80KV.

2. Cell protection, switching and measurent :

- ✓ One (1) break-switch :
 - Rated breaking..... 400/630^a
 - Rated closure power 40/52KA
- ✓ One (1) earth switch :
 - Rated Clousure power 40/50KA
- ✓ One (1) Vacuum circuit breaker:
 - Rated insulation voltaje 24 KV
 - Rated current.....400/630 A
 - Rated short time current (RMS) for 1 s16/20 KA
 - Electrical operated
 - Auxiliary contacs
 - Microprocessor protecction: 50/51 +50N/51N and comunicaciones RS232 and RS485.
 - Current sensors installed on bushing for microprorecessor readings.
- ✓ Three (3) voltage transformers insulation up to 13, cast resin type with:
- ✓ Value X***.√3/110:√3 V, 50/60hz, burden and accuary 40 VA C 1.0,5, 50VA 3P fixed versión.
- ✓ One (1) self-powered voltage presence indicator light according IEC 61958.

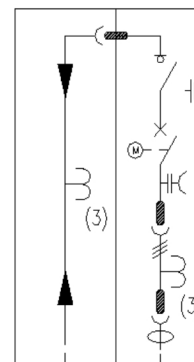

3. Screw terminals:

- Six (6) screw terminals for máximo wire section 1x240mm².

4. Optional:

- ✓ Protecction according to group ANSI:
 - Phase overcurrent (50-51.)
 - Neutral overcurrent (50N-51N)
 - Maximum and mínimo voltage (27/59)
 - Maximum displacement voltage (59N)
 - Maximum and mínimo frequency (81M/m)
 - 46, 49RMS, 48/51LR, 66, 32
 - With communications RS-485
 - Minimum impedance protection (21B)
 - Loss of field (40)
 - Ground fault protection (64REF)
 - Differential protection generator (87G)

Other configurations avialble: indoor, outdoor, multiple parallel, etc... to consult.

(1) Only in protection cell

(2) The rated current is to a máximo ambient temeperature of 40°C. Consult other temperaturas.

(3) Standards: IEC 62271-1, IEC 62271-200, IEC 60265-1, IEC 62271-102, IEC 62271-105, IEC 62271-100, IEC 602255, IEC 60259 e IEC 61958.

X*** to define the order according to rated voltage from 3 a 13,80KV.